

Cisco Catalyst IE3300 Rugged Series

Contents

| | |
|------------------------|----|
| Product Overview | 3 |
| Features and Benefits | 4 |
| Products Overview | 4 |
| Product Specifications | 5 |
| System Dimensions | 6 |
| Ordering Information | 15 |
| Warranty | 16 |
| Cisco Services | 16 |
| Cisco Capital | 16 |

The Cisco Catalyst® IE3300 Rugged Series ushers in mainstream adoption of Gigabit Ethernet connectivity in a compact, form-factor, modular switch that is purpose-built for a wide variety of extended enterprise and industrial applications.

Product Overview

Cisco Catalyst IE3300 Rugged Series switches deliver high-speed Gigabit Ethernet connectivity in a compact form factor, and are designed for a wide range of industrial applications where hardened products are required. The modular design of the Cisco Catalyst IE3300 Rugged Series offers the flexibility to expand to up to 26 ports of Gigabit Ethernet with a range of expansion module options. The platform is built to withstand harsh environments in manufacturing, energy, transportation, mining, smart cities, and oil and gas. The IE3300 platform is also ideal for extended enterprise deployments in outdoor spaces, warehouses, and distribution centers.

These switches run Cisco IOS® XE, a next-generation operating system with built-in security and trust, featuring secure boot, image signing, and the Cisco® Trust anchor module. Cisco IOS XE also provides API-driven configuration with open APIs and data models.

The Cisco Catalyst IE3300 Rugged Series can be managed with powerful management tools such as Cisco DNA Center and Cisco Industrial Network Director, and can be easily set up with a completely redesigned user-friendly modern GUI tool called WebUI. The platform also supports Flexible NetFlow (FNF) for real-time visibility into traffic patterns and threat analysis with Cisco Stealthwatch®.

The IE3300 series (with expansion module) supports up to 24 ports of PoE or 16 ports of PoE+ that is ideal for connecting PoE-powered end devices such as IP cameras, phones, wireless access points, sensors, and more.



Figure 1.

Features and Benefits

Table 1. IE3300 Features and Benefits

| Feature | Benefit |
|--|--|
| Robust industrial design | <ul style="list-style-type: none"> • Built for harsh environments and temperature ranges (-40°C to +75°C) • Fanless, convection-cooled with no moving parts for extended durability • Hardened for vibration, shock and surge, and electrical noise immunity • Complies with multi-industry specifications for automation, ITS, and substation environments • Improves uptime, performance, and safety of industrial systems and equipment • Covers a wide range of Power over Ethernet (PoE) application requirements • Alarm I/O for monitoring and signaling to external equipment |
| Full Gigabit Ethernet interfaces | <ul style="list-style-type: none"> • Provides secure access for new high-speed applications in the industrial space • Packs up to 10 ports of GE - 2x1 Gigabit Small Form-Factor Pluggable (SFP) uplinks plus 8x1 Gigabit copper or PoE+ RJ45 downlinks in a small form-factor base system • Expandable to 26 ports of GE by attaching one of 7 compatible modules (copper, PoE, fiber options) • Connects high-speed wireless access points (802.11n, 802.11ac) • Enables High-Definition (HD) IP cameras and Programmable Logic Controller (PLC) • Delivers multiple rings and redundant ring topology for new network configurations • Extends geographical scalability where longer-distance connectivity is required |
| High-density industrial Power over Ethernet (PoE) | <ul style="list-style-type: none"> • Supports up to 24 PoE or 16 PoE+ ports • Controls costs by limiting wiring, distribution panels, and circuit breakers • Reduces equipment needs, thus requiring less space and reducing heat dissipation • Enables ready-to-use PoE devices, such as IP phones, cameras, and wireless access points |
| User-friendly GUI, called WebUI | <ul style="list-style-type: none"> • Allows for easy configuration and monitoring • Eliminates the need for more complex, terminal emulation programs • Reduces the cost of deployment |
| SwapDrive for zero-configuration replacement | <ul style="list-style-type: none"> • True zero-configuration and simple switch replacement in the event of a failure • No networking expertise required • Helps ensure fast recovery |
| Flexible NetFlow (FNF) | <ul style="list-style-type: none"> • Provides enhanced flow and threat visibility • Enables optimization of the network infrastructure, reduces operation costs, and improves capacity planning and security incident detection |

Products Overview

Table 2. Product feature sets

| Product family | Platforms supported | Cisco IOS Software image (feature sets) supported |
|----------------|---------------------|---|
| IE3000 | IE3300 | Network Essentials |

Product Specifications

Table 3 highlights the hardware configuration for Cisco Catalyst IE3300 Rugged Series switches.

Table 3. IE3300 Hardware Configurations

| Hardware specification | Cisco IE-3300-8T2S-E | Cisco IE-3300-8P2S-E |
|------------------------|---|--|
| Total 100/1000 ports | 10 | 10 |
| SFP-based ports | 2 | 2 |
| PoE/PoE+ ports | 0 | 8 |
| PoE power budget | Not applicable | 360W ¹ (including expansion module) |
| Removable storage | SD card ² | SD card ² |
| Alarm inputs | 2 alarms in, 1 alarm out | 2 alarms in, 1 alarm out |
| Console ports | 1 RS-232 (via RJ-45), 1 USB Mini Type B | 1 RS-232 (via RJ-45), 1 USB Mini Type B |
| Power inputs | Dual DC power inputs | Dual DC power inputs |

¹ In order to achieve 360W power budget, the minimum power requirements as specified in Table 7 for the switch need to be considered when selecting the power supply.

² The SD card is optional and is not shipped by default with the switch.



IEM-3300-8T= IEM-3300-8S= IEM-3300-8P= IEM-3300-6T2S= IEM-3300-14T2S= IEM-3300-16T= IEM-3300-16P=

Figure 2.

Table 4 highlights the hardware configuration for Cisco Catalyst IE3300 Rugged Series modules.

Table 4. Hardware Configuration for Cisco Catalyst IE3300 Rugged Series Modules

| Descriptions | Total ports on expansion module | Copper (RJ45) | PoE/PoE+ | SFP | Total system ports (including expansion module) |
|---------------|---------------------------------|---------------|----------|-----|---|
| IEM-3300-8T= | 8 | 8 | - | - | 18 |
| IEM-3300-8P= | 8 | - | 8 | - | 18 |
| IEM-3300-8S= | 8 | - | - | 8 | 18 |
| IEM-3300-16T= | 16 | 16 | - | - | 26 |
| IEM-3300-16P= | 16 | - | 16 | - | 26 |

| Descriptions | Total ports on expansion module | Copper (RJ45) | PoE/PoE+ | SFP | Total system ports (including expansion module) |
|-----------------|---------------------------------|---------------|----------|-----|---|
| IEM-3300-6T2S= | 8 | 6 | - | 2 | 18 |
| IEM-3300-14T2S= | 16 | 14 | - | 2 | 26 |


Table 5 highlights the physical configuration for Cisco Catalyst IE3300 Rugged Series switches and modules.

Table 5. IE3300 physical Configurations


| PID details | Dimensions (H x W x D) | Weight | Mounting |
|-----------------|---------------------------|----------|----------|
| IE-3300-8T2S-E | 6 in. X 3.6 in. X 5.3 in. | 3.75 lbs | DIN rail |
| IE-3300-8P2S-E | 6 in. X 3.6 in. X 5.3 in. | 3.75 lbs | DIN rail |
| IEM-3300-8T= | 6 in. X 2.4 in. X 5.3 in. | 1.94 lbs | DIN rail |
| IEM-3300-8P= | 6 in. X 2.4 in. X 5.3 in. | 1.94 lbs | DIN rail |
| IEM-3300-8S= | 6 in. X 2.4 in. X 5.3 in. | 2.06 lbs | DIN rail |
| IEM-3300-16T= | 6 in. X 3.4 in. X 5.3 in. | 2.06 lbs | DIN rail |
| IEM-3300-16P= | 6 in. X 3.4 in. X 5.3 in. | 2.06 lbs | DIN rail |
| IEM-3300-6T2S= | 6 in. X 2.4 in. X 5.3 in. | 1.94 lbs | DIN rail |
| IEM-3300-14T2S= | 6 in. X 3.4 in. X 5.3 in. | 2.06 lbs | DIN rail |

System Dimensions

Front View

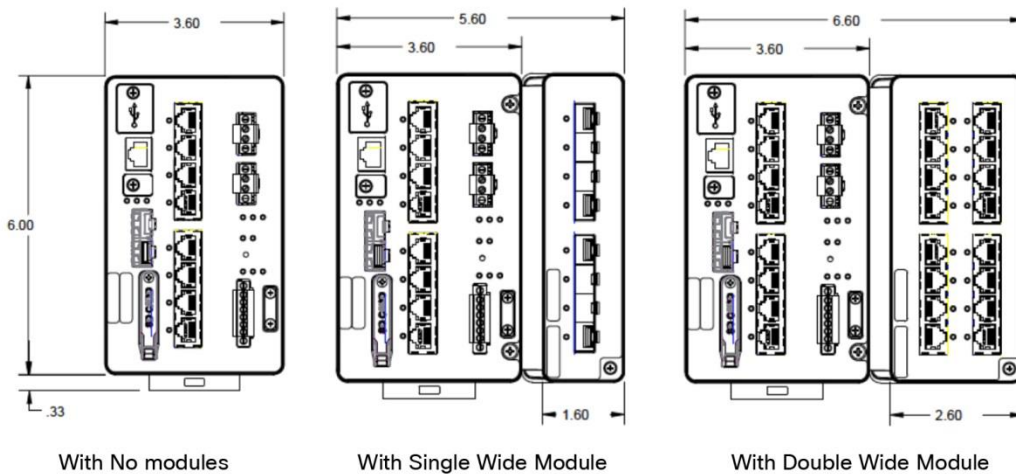


Module Dimensions – Front View

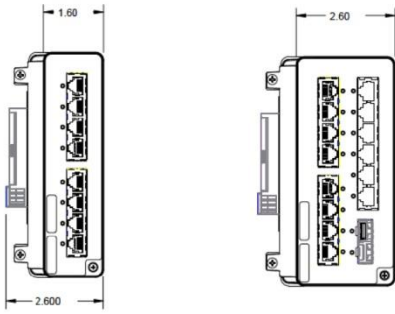

Single wide module

Double wide module

Top View

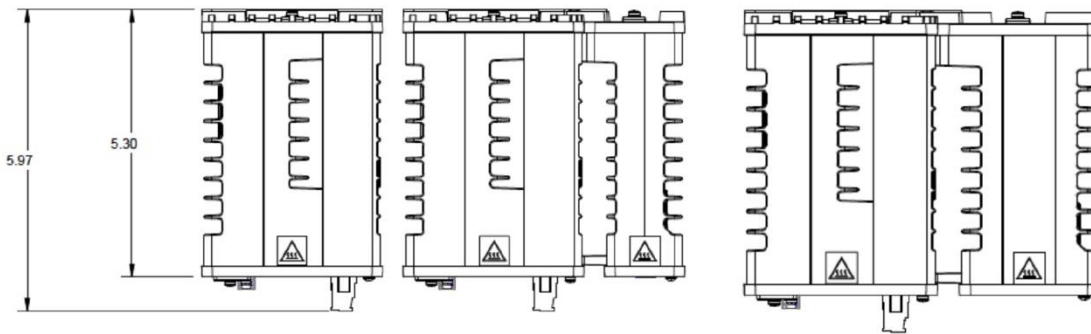

With No modules

With Single Wide Module

With Double Wide Module

Table 6 highlights the performance and scalability features for Cisco Catalyst IE3300 Rugged Series switches.

Table 6. IE3300 Performance and Scalability Features

| Features | Cisco IE-3300-8T2S-E | Cisco IE-3300-8P2S-E |
|--|--|--|
| Forwarding rate | Line rate for all ports and all packet sizes | Line rate for all ports and all packet sizes |
| Number of queues | 8 | 8 |
| Unicast MAC addresses | 8K | 8K |
| Internet Group Management Protocol (IGMP) multicast groups | 1K | 1K |
| VLAN IDs | 256 | 256 |
| Spanning Tree Protocol (STP) instances | 128 | 128 |
| Access Control Lists (PACL) | 1.5K | 1.5K |

| Features | Cisco IE-3300-8T2S-E | Cisco IE-3300-8P2S-E |
|-------------------------------|----------------------|----------------------|
| DRAM | 2 GB | 2 GB |
| Flash | 1.5 GB | 1.5 GB |
| SD card capacity ¹ | 4 GB | 4 GB |

¹The SD card is optional and is not shipped by default with the switch.

Table 7 highlights the power specifications for Cisco Catalyst IE3300 Rugged Series switches.

Table 7. IE3300 Power Specifications

| Features | Cisco IE-3300-8T2S-E | Cisco IE-3300-8P2S-E |
|--------------------------------|--|--|
| Input voltage range | Redundant DC input voltage: nominal 9.6 to 60VDC | Redundant DC input voltage: nominal 9.6 to 60VDC 48VDC is required for PoE and 54VDC is required for PoE+ |
| Maximum Input current | 4.5A | 10.6A |
| Power consumption ¹ | 33W | 35W |

¹ Power consumption for non PoE supported model is measured at 12V and for the PoE supported model is measured at 54V. Power consumption does not include PoE power.

Table 8 highlights the power specifications for supported expansion modules in Cisco Catalyst IE3300 Rugged Series switches.

Table 8. IEM3300 modules Power Consumption

| Product ID detail | Power Consumption ¹ |
|-------------------|--------------------------------|
| IEM-3300-8T= | 7W |
| IEM-3300-8P= | 18W |
| IEM-3300-8S= | 13W |
| IEM-3300-16T= | 13W |
| IEM-3300-16P= | 24W |
| IEM-3300-6T2S= | 8W |
| IEM-3300-14T2S= | 15W |

¹ Power consumption for non PoE supported model is measured at 12V and for the PoE supported model is measured at 54V.

Table 9 highlights the power supply options for Cisco Catalyst IE3300 Rugged Series switches.

Table 9. Power Supply Options

| Features | Wattage | Rated nominal input operating range | PoE/PoE+ support ¹ |
|---------------------------------|---------|--|-------------------------------|
| PWR-IE50W-AC= | 50W | AC 100-240V/1.25A 50-60Hz or DC 125-250V/1.25A | No |
| PWR-IE50W-AC-L= ² | 50W | AC 100-240V/1.0A 50-60Hz | No |
| PWR-IE65W-PC-AC= | 65W | AC 100-240V / 1.4A 50-60Hz or DC 125-250V / 1.0A | Yes |
| PWR-IE65W-PC-DC= | 65W | DC 24-48VDC / 4.5A | Yes |
| PWR-IE170W-PC-AC= | 170W | AC 100-240V / 2.3A 50-60Hz or DC 125-250V / 2.1A | Yes |
| PWR-IE170W-PC-DC= | 170W | DC 12-54VDC / 2.3A | Yes |
| PWR-IE240W-PCAC-L= ² | 240W | AC 100-240V/2.5A 50-60Hz | Yes |
| PWR-IE480W-PCAC-L= ² | 480W | AC 100-240V/5.0A 50-60Hz | Yes |

¹ The entire power budget for the switch and PoE ports must stay within the power supply.

² The power supplies are not certified for smart grid and hazardous locations. These power supplies are IP20 rated.

Table 10 highlights the supported software features for Cisco Catalyst IE3300 Rugged Series switches.

Table 10. Key Supported Software Features

| Network Essentials License(default) | Features |
|-------------------------------------|---|
| Layer 2 switching | IEEE 802.1, 802.3 standard, NTP, UDLD, CDP, LLDP, unicast MAC filter, VTPv2, VTPv3, EtherChannel, voice VLAN, PVST+, MSTP, and RSTP |
| Multicast | IGMPv1, v2, v3 snooping, IGMP filtering, IGMP querier |
| Management | WebUI, MIB, SmartPort, SNMP, syslog, DHCP server, SPAN session, RSPAN, Express setup |
| Security | Port security, 802.1x, Dynamic Host Configuration Protocol (DHCP) snooping, dynamic ARP inspection, IP source guard, guest VLAN MAC authentication bypass, 802.1x multidomain authentication, storm control - unicast, multicast, broadcast, SCP, SSH, SNMPv3, TACACS+, RADIUS server/client, MAC address notification, BPDU guard, Port ACL, Flexible NetFlow (FNF) |
| Quality of Service (QoS) | Ingress policing, rate limit, egress queuing and shaping, auto QoS |
| Layer 2 IPv6 | IPv6 host support, SNMP over IPv6 |
| Layer 3 routing | Inter-VLAN routing |

| Network Essentials License(default) | Features |
|-------------------------------------|--|
| Industrial Ethernet | CIP Ethernet/IP, IEEE 1588 PTP v2 |
| Redundancy | Resilient Ethernet Protocol (REP) ring |
| Utility | Dying gasp |

Table 11 highlights the compliance specifications for Cisco Catalyst IE3300 Rugged Series switches.

Table 11. Compliance Specifications¹

| Descriptions | Specifications |
|---------------------------|---|
| Electromagnetic emissions | FCC 47 CFR Part 15 subpart B Class A EN 55032/CISPR 32 Class A VCCI Class A AS/NZS CISPR 32 Class A CISPR 11 Class A ICES 003 Class A CNS 13438 Class A KN 32 Class A EN 300 386 |
| Electromagnetic immunity | CISPR 35 EN 55024 KN 35 EN 61000-4-2 Electro Static Discharge (air – 15kV, contact – 8kV) EN 61000-4-3 Radiated RF (10V/m UTP, 20V/m STP) EN 61000-4-4 Electromagnetic Fast Transients (4kV) EN 61000-4-5 Surge (2KV/1KV Power, 4KV STP) EN 61000-4-6 Conducted RF (10V UTP) EN 61000-4-8 Power Frequency Magnetic Field (300A/m) EN 61000-4-10 Pulsed Magnetic Field (30 A/m) EN 61000-4-16 Conducted CM Disturbances (30V, Cont/ 300V, 1 sec) EN 61000-4-17 Ripple Immunity DC Power (10%) EN 61000-4-18 Damped Oscillatory Wave (2.5kV, 1MHz) EN-61000-4-29 DC Voltage Dips and Interruptions |

| Descriptions | Specifications |
|--|---|
| Industry standards | EN 61000-6-2 Industrial Immunity EN 61000-6-4 Industrial Emissions EN 61000-6-1 Light Industrial Immunity EN 61326-1 Measurement, Control & Laboratory Equipment IEEE 1613 Electric Power Stations Communications Networking EN/IEC 61850-3 Electric Substations Communications Networking EN50121-4 Railway – Signaling and Telecommunications Apparatus [test in progress] ODVA Industrial EtherNet/IP IP30 |
| Safety standards and certifications | Information Technology Equipment: UL/CSA 60950-1, CB to IEC 60950-1 with all country deviations UL/CSA 62368-1, CB to IEC 62368-1 with all country deviations [test in progress] Industrial floor (control equipment) ² : UL/CSA 61010-2-201 CB report and certificate to IEC/EN 61010-2-201 Hazardous locations ² : UL121201(Class I, Div 2, groups A-D) CSA 213 (Class I, Div 2, groups A-D) UL/CSA 60079-0, -15 (Class I, Zone 2, Gc/IIC) IEC 60079-0, -15 IECEx test report (Class I, Zone 2, Gc/IIC) EN 60079-0, -15 ATEX certificate (Class I, Zone 2, Gc/IIC) |
| Operating environment | Operating temperature: -40°C to +70°C (40 LFM vented enclosure) -40°C to +60°C (sealed enclosure) -34°C to +75°C (Min. 200 LFM fan or blower-equipped enclosure) +85°C (type tested for 16 hours) Altitude: up to 15,000 feet |
| Storage environment | Temperature: -40°C to +85°C degrees Altitude: 15,000 feet IEC 60068-2-14 |
| Humidity | Relative humidity of 5% to 95% non-condensing IEC 60068-2-78 IEC 60068-2-30 |
| Shock and vibration | IEC 60068-2-27 (operational shock, 50G, 3ms, half sine) IEC 60068-2-27 (non-operational shock, 65-80G, 9ms, trapezoidal) MIL-STD-810, Method 514.4 |
| Corrosion | EN 60068-2-52 (salt fog) - [test in progress] EN 60068-2-60 (flowing mixed gas) - [test in progress] |

| Descriptions | Specifications |
|--------------|--|
| Warranty | Five-year limited hardware warranty on all IE3300 product IDs and all Industrial Ethernet (IE) power supplies. See more information under the Warranty section |

¹ For more detailed information on safety approved power/thermal ratings refer the Hardware Installation Guide

² In progress

Table 12 highlights Mean-Time-Between-Failures (MTBF) for Cisco Catalyst IE3300 Rugged Series switches.

Table 12. MTBF Information

| Product ID detail | Rated MTBF (hours) |
|-------------------|--------------------|
| IE-3300-8T2S-E | 633,420 |
| IE-3300-8P2S-E | 611,350 |
| IEM-3300-8T= | 3,041,040 |
| IEM-3300-8P= | 2,931,233 |
| IEM-3300-8S= | 6,810,960 |
| IEM-3300-16T= | 1,594,210 |
| IEM-3300-16P= | 1,043,520 |
| IEM-3300-6T2S= | 3,729,130 |
| IEM-3300-14T2S= | 1,865,300 |

Table 13 highlights information about management and standards for Cisco Catalyst IE3300 Rugged Series switches.

Table 13. Management and Standards

| Descriptions | Specifications | |
|----------------|---|---|
| IEEE standards | IEEE 802.1D MAC Bridges, STP IEEE 802.1p Layer2 COS prioritization IEEE 802.1q VLAN IEEE 802.1s Multiple Spanning-Trees IEEE 802.1w Rapid Spanning-Tree IEEE 802.1x Port Access Authentication IEEE 802.1AB LLDP IEEE 802.3ad Link Aggregation (LACP) IEEE 1588v2 PTP Precision Time Protocol | IEEE 802.3ah 100BASE-X SMF/MMF only IEEE 802.3x full duplex on 10BASE-T IEEE 802.3 10BASE-T specification IEEE 802.3u 100BASE-TX specification IEEE 802.3ab 1000BASE-T specification IEEE 802.3z 1000BASE-X specification IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet plus |

| Descriptions | Specifications | |
|-------------------------|--|--|
| RFC compliance | RFC 768: UDP RFC 783: TFTP RFC 791: IPv4 protocol RFC 792: ICMP RFC 793: TCP RFC 826: ARP RFC 854: Telnet RFC 959: FTP | RFC 1157: SNMPv1 RFC 1901,1902-1907 SNMPv2 RFC 2273-2275: SNMPv3 RFC 2571: SNMP Management RFC 1166: IP Addresses RFC 1256: ICMP Router Discovery RFC 1305: NTP RFC 951: BootP RFC 1492: TACACS+ RFC 1493: Bridge MIB Objects RFC 1534: DHCP and BOOTP interoperation RFC 1542: Bootstrap Protocol RFC 1643: Ethernet Interface MIB RFC 1757: RMON RFC 2068: HTTP RFC 2131, 2132: DHCP RFC 2236: IGMP v2 RFC 3376: IGMP v3 RFC 2474: DiffServ Precedence RFC 3046: DHCP Relay Agent Information Option RFC 3580: 802.1x RADIUS RFC 4250-4252 SSH Protocol |
| SNMP MIB objects | 802.1X MIB CISCO-DHCP-SNOOPING-MIB CISCO-UDLD-MIB CISCO-ENVMON-MIB CISCO-PRIVATE-VLAN-MIB CISCO-PAE-MIB Cisco-Port-QoS-MIB CISCO-ERR-DISABLE-MIB CISCO- PROCESS-MIB LLDP-MIB CiscoMACNotification-MIB CISCO-CONFIG-COPY-MIB LLDP-MED-MIB Bridge-MIB CISCO-CAR-MIB CISCO-LAG-MIB CISCO-SYSLOG-MIB CISCO-FTP-CLIENT-MIB CISCO-VLAN-IFTABLE-RELATIONSHIP-MIB CISCO-VLAN-MEMBERSHIP-MIB | CISCO-IF-EXTENSION-MIB CISCO-IMAGE-MIB CISCO-MEMORY-POOL-MIB CISCO-PING-MIB SNMP-TARGET-EXT-MIB IF_MIB ENTITY-MIB LLDP-EXT-PNO-MIB NOTIFICATION-LOG-MIB OLD-CISCO-CPU-MIB ETHERLIKE-MIB OLD-CISCO-SYSTEM-MIB OLD-CISCO-MEMORY-MIB RMON-MIB SNMP-COMMUNITY-MIB SNMP-FRAMEWORK-MIB SNMP-PROXY-MIB SNMP-MPD-MIB SNMP-NOTIFICATION-MIB SNMP-TARGET-MIB |

| Descriptions | Specifications | |
|--------------|--|---|
| | Cisco-REP-MIB CISCO-PORT-STORM-CONTROL-MIB CISCO-CDP-MIB CISCO-IP-STAT-MIB CISCO-LICENSE-MGMT-MIB CISCO-STP-EXTN-MIB CISCO-VTP-MIB IEEE8023-LAG-MIB SMON-MIB CISCO-ACCESS-ENVMON-MIB CISCO-CALLHOME-MIB CISCO-CONFIG-MAN-MIB CISCO-FLASH-MIB | SNMP-USM-MIB CISCO-DATACOLLECTION-MIB CISCO-CABLE-DIAG-MIB CISCO-PORT-SECURITY-MIB BULK_FILE_MIB NAC-NAD-MIB CISCO-ENTITY-ALARAM-MIB SNMP-VIEW-BASED-ACM-MIB CISCO-MAC-AUTH-BYPASS-MIB CISCO-AUTH-FRAMEWORK-MIB CISCO-BRIDGE-Ext-MIB SNMPv2-MIB CISCO-ENTITY-VENDORTYPE-OID-MIB CISCO-PRODUCTS-MIB |

Table 14 highlights information about supported SFPs for Cisco Catalyst IE3300 Rugged Series switches.

Table 14. SFP Support

| Part number | Specifications | SFP type | Temperature range ¹ | Maximum distance | Cable type | Dom support |
|------------------|----------------|----------|--------------------------------|------------------|-------------------------|-------------|
| GLC-FE-100FX-RGD | 100BASE-FX | FE | IND | 2 km | Multimode fiber (MMF) | No |
| GLC-FE-100LX-RGD | 100BASE-LX10 | FE | IND | 10 km | Single-Mode Fiber (SMF) | No |
| GLC-FE-100FX | 100BASE-FX | FE | COM | 2 km | MMF | No |
| GLC-FE-100LX | 100BASE-LX10 | FE | COM | 10 km | SMF | No |
| GLC-FE-100EX | 100BASE-EX | FE | COM | 40 km | SMF | No |
| GLC-FE-100ZX | 100BASE-ZX | FE | COM | 80 km | SMF | No |
| GLC-FE-100BX-U | 100BASE-BX10 | FE | COM | 10 km | SMF | No |
| GLC-FE-100BX-D | 100BASE-BX10 | FE | COM | 10 km | SMF | No |
| GLC-SX-MM-RGD | 1000BASE-SX | GE | IND | 220-550 m | MMF | Yes |
| GLC-LX-SM-RGD | 1000BASE-LX/LH | GE | IND | 550 m / 10 km | MMF / SMF | Yes |
| GLC-ZX-SM-RGD | 1000BASE-ZX | GE | IND | 70 km | SMF | Yes |
| SFP-GE-S | 1000BASE-SX | GE | EXT | 220-550 m | MMF | Yes |
| SFP-GE-L | 1000BASE-LX/LH | GE | EXT | 550 m / 10 km | MMF / SMF | Yes |

| Part number | Specifications | SFP type | Temperature range ¹ | Maximum distance | Cable type | Dom support |
|-------------|----------------|----------|--------------------------------|------------------|------------|-------------|
| SFP-GE-Z | 1000BASE-ZX | GE | EXT | 70 km | SMF | Yes |
| GLC-BX-U | 1000BASE-BX10 | GE | COM | 10 km | SMF | Yes |
| GLC-BX-D | 1000BASE-BX10 | GE | COM | 10 km | SMF | Yes |
| GLC-SX-MM | 1000BASE-SX | GE | COM | 220-550 m | MMF | Yes |
| GLC-LH-SM | 1000BASE-LX/LH | GE | COM | 550 m / 10 km | MMF / SMF | Yes |
| GLC-ZX-SM | 1000BASE-ZX | GE | COM | 70 km | SMF | Yes |
| GLC-EX-SMD | 1000BASE-EX | GE | COM | 40 km | SMF | Yes |
| GLC-TE | 1000BASE-T | GE | EXT | 100 m | Cat5e | No |

¹ If non-industrial SFPs (EXT, COM) are used, the switch operating temperature must be derated.

Ordering Information

Table 15 lists the ordering information for fixed system, expansion modules and memory that are commonly used with the Cisco Catalyst IE3300 switches.

Table 15. Ordering Information

| Product ID detail | Description |
|-------------------|--|
| IE-3300-8T2S-E | Cisco Catalyst IE3300 Rugged Series System, 8 non-PoE copper ports, 2 fiber SFPs, Network Essentials |
| IE-3300-8P2S-E | Cisco Catalyst IE3300 Rugged Series System, 8 PoE copper ports, 2 fiber SFPs, Network Essentials |
| IEM-3300-8T= | Cisco Catalyst IE3300 Rugged Series module, 8 non-PoE copper |
| IEM-3300-8P= | Cisco Catalyst IE3300 Rugged Series module, 8 PoE copper |
| IEM-3300-8S= | Cisco Catalyst IE3300 Rugged Series module, 8 SFP fiber |
| IEM-3300-16T= | Cisco Catalyst IE3300 Rugged Series module, 16 non-PoE copper |
| IEM-3300-16P= | Cisco Catalyst IE3300 Rugged Series module, 16 PoE copper |
| IEM-3300-6T2S= | Cisco Catalyst IE3300 Rugged Series module, 6 non-PoE copper, 2 SFP fiber |
| IEM-3300-14T2S= | Cisco Catalyst IE3300 Rugged Series module, 14 non-PoE copper, 2 SFP fiber |
| SD-IE-4GB= | IE 4GB SD memory card for IE |
| STK-RACK-DINRAIL= | 19" DIN Rail mount kit |

Warranty

Five-year limited HW warranty on all IE3300 PIDs and all IE Power Supplies ([see table 9 above](#)) See link below for more details on warranty <https://www.cisco.com/c/en/us/products/warranties/warranty-doc-c99-740591.html>.

Cisco Services

<https://www.cisco.com/web/services/>

Cisco Capital

Flexible payment solutions to help you achieve your objectives

Cisco Capital makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments. [Learn more.](#)

Americas Headquarters

Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters

Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters

Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)